
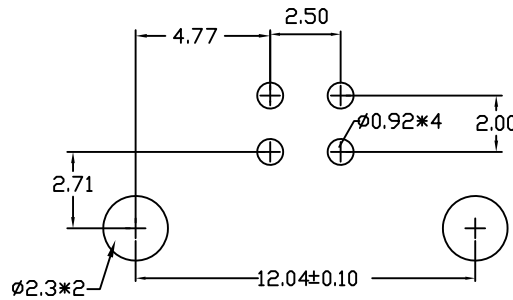
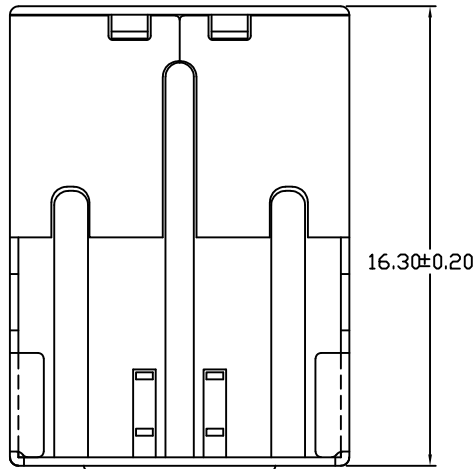
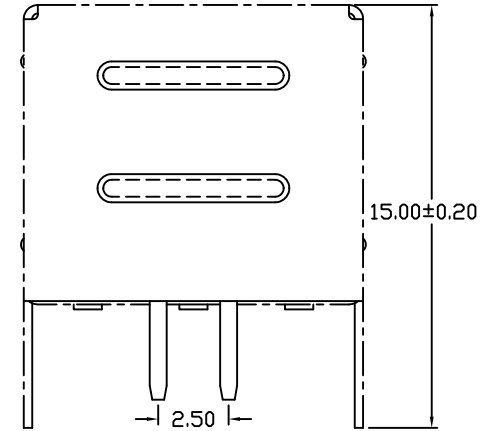
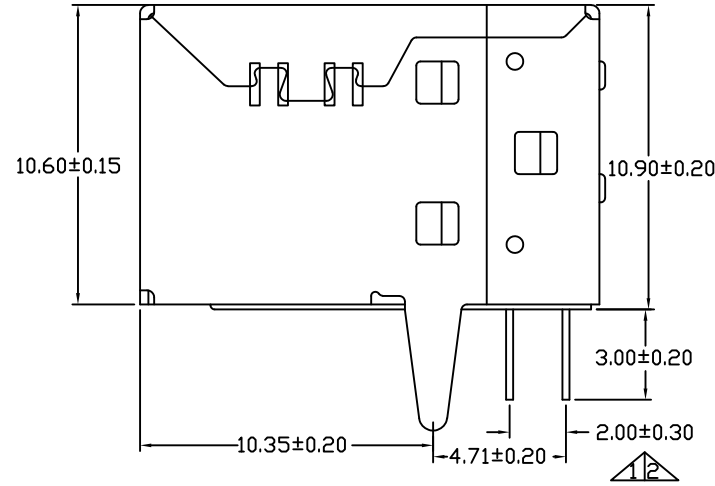


This document is the property of Nian-Yeong Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Nian-Yeong Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.

CUSTOMER DRAWING

REV.	DESCRIPTION	APPROVED BY	DATE	ECN NO.
A				
B				
C				

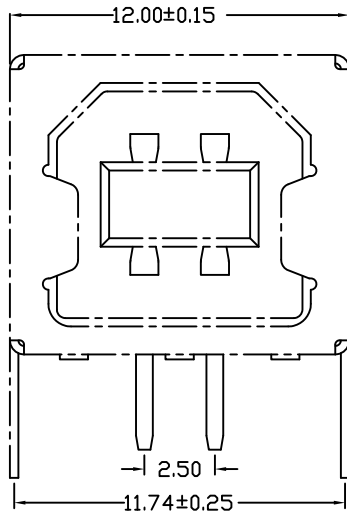

规格说明:Specifications:

电气特性:Electrical:

1. 额定电流 : Current Rating
1.5A/contact terminal
2. 额定电压 : Voltage Rating
30V DC
3. 接触阻抗:Contact Resistance
30 milliohms MAX
4. 耐电压:Dielectric Withstanding Voltage:
500 V AC
5. 绝缘阻抗:Insulation Resistance:
1000MEGA ohms MIN

原材料:Raw material:

1. 塑胶:Plastic cement:
High Temperature Thermoplastics,
LCP White/Black
2. 端子:Contact:Copper Alloy C2680
3. 外壳:Shell:SPCC/Copper Alloy C2680

电镀:Electroplate:

1. 端子:Contact: Plated Gold 30U" in Mating Area;
Tin 100U" On Solder Talls
2. 外壳:Shell:
Nickel Plating 60U"-80U"

DRAWN	Mark Kao	APP'D	Ku Chou	UNIT	mm	TOLERANCE		TITLE	USB B(F)板端直脚DIP 90°			SHEET
CHK'D	Emily Suen			SCALE	1:1	.x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03 ANGULA ±1°		NIAN YEONG ENTERPRISE 年永實業有限公司	PART NO.	US-04F3-21	DWG NO.	QC4685