

This document is the property of Nian-Yeong Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Nian-Yeong Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.




CUSTOMER DRAWING

REV.	DESCRIPTION	APPROVED BY	DATE	ECN NO.
A	RELEASE	Ku Chou	05/09/19*	
B	CHANGE DESIGN	Ku Chou	03/01/20*	
C				

Table A

WP-04F2-250-11 WP-04F2-334-11	WP-03F2-138-11 WP-03F2-195-11
WP-03F2-195-11	GOLD FLASH PLATED
WP-04F2-334-11	GOLD FLASH PLATED
WP-03F2-138-11	10u" GOLD PLATED
WP-04F2-250-11	10u" GOLD PLATED
PART No.	FINISH

- MATERIAL :
 - HOUSING : PA66 UL94V-0 ; COLOR : BLACK
 - CONTACT : BRASS
 - O-RING : EPDM
 - NUT : BRASS
- FINISH :
 - CONTACT : SEE TABLE A
UNDER PLATE : NICKEL
 - NUT : NICKEL PLATED
- ELECTRICAL SPECIFICATION :
 - Rated current : 12A
 - Rated Voltage : 630V
 - Water proof: IP67/68
- Environmental :
 - Operation Temperature : -40℃~105℃

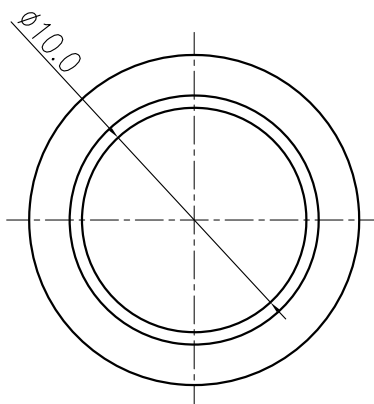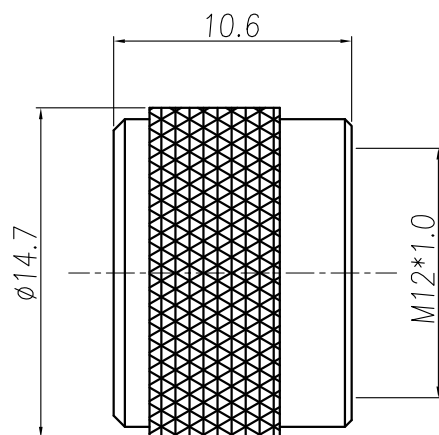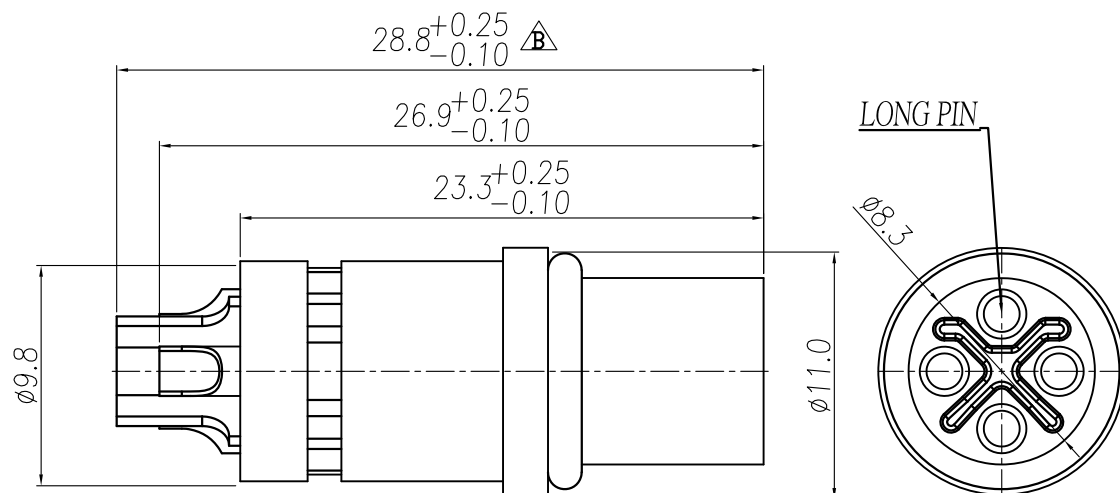

NUT

DRAWN	Emily Suen	APP'D	Ku Chou	UNIT	mm	TOLERANCE				TITLE	M12 S-CODING (F) 成形焊線式	SHEET	
CHK'D	Ku Chou			SCALE	1:1	.x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03 ANGULA ±1°				PART NO.	SEE TABLE A	DWG NO.	QC9507
												VERSION	B



NIAN YEONG ENTERPRISE
年永實業有限公司