

This document is the property of Nian-Yeong Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Nian-Yeong Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.

CUSTOMER DRAWING

REV.	DESCRIPTION	APPROVED BY	DATE	ECN NO.
A	RELEASE	Fido Weng	22/03/10*	
B	增加料號		14/01/15*	
C				



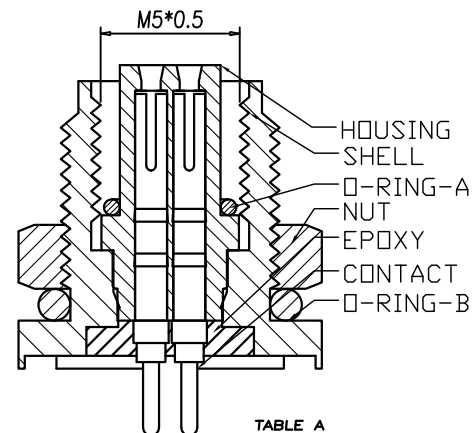



TABLE A

WP-02F2-83-11	GOLD FLASH	BLACK NICKEL	BLACK NICKEL
WP-04F2-284-11	GOLD 30u"	NICKEL	NICKEL
WP-04F2-146-11	GOLD 10u"	NICKEL	NICKEL
WP-03F2-67-11	GOLD 10u"	NICKEL	NICKEL
WP-02F2-43-11	GOLD 10u"	NICKEL	NICKEL
WP-04F2-51	GOLD FLASH	NICKEL	NICKEL
WP-03F2-50-11	GOLD FLASH	NICKEL	NICKEL
WP-02F2-32-11	GOLD FLASH	NICKEL	NICKEL
PART NO	CONTACT	NUT	SHELL


2PIN	3PIN	4PIN
WP-02F2-32-11 WP-02F2-43-11 WP-02F2-83-11	WP-03F2-50-11 WP-03F2-67-11	WP-04F2-51 WP-04F2-146-11 WP-04F2-284-11

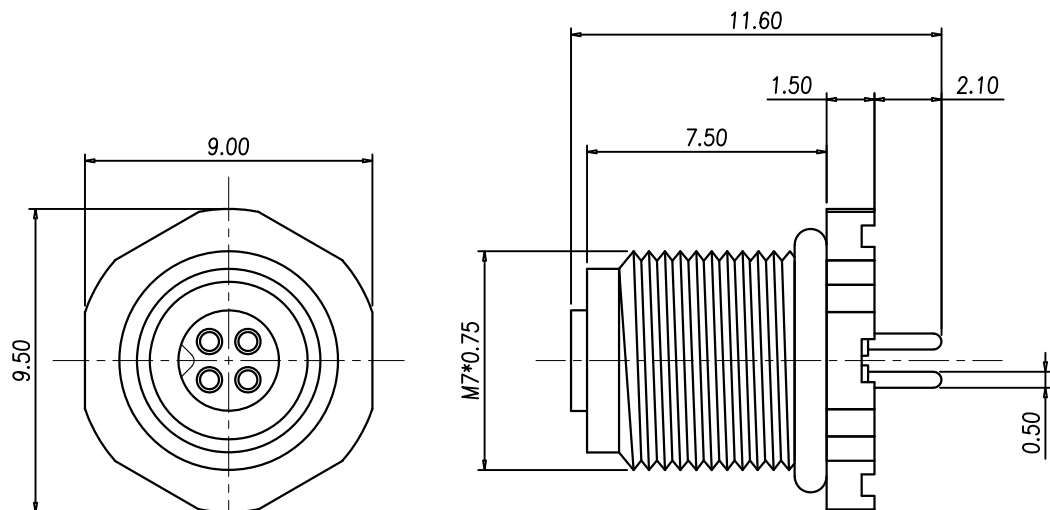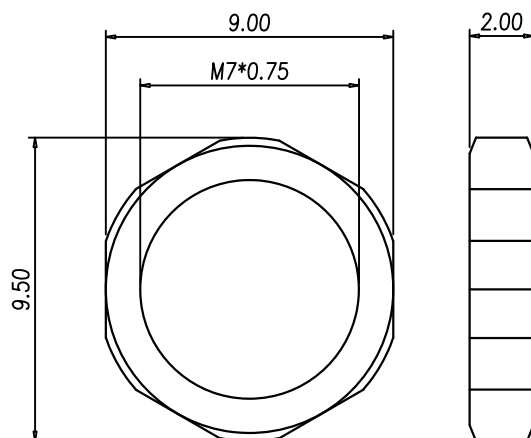

NUT

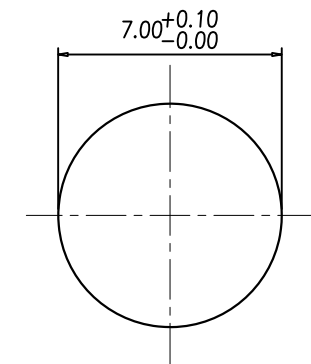

RECOMMEND PANEL CUT-OUT



RECOMMEND PCB LAYOUT

- MATERIAL :
 - HOUSING : PBT UL94V-0; COLOR : BLACK
 - CONTACT : BRASS
 - NUT : BRASS
 - SHELL : BRASS
 - O-RING : NBR ; COLOR : BLACK
- FINISH :
 - CONTACT : SEE TABLE A
 - NUT : SEE TABLE A
 - SHELL : SEE TABLE A
- ELECTRICAL SPECIFICATION :
 - Rated current : 1A
 - Rated Voltage : 60V
 - Water proof: IP67
- Environmental :
 - Operation Temperature : -20 ℃~85℃

DRAWN	Mark Kao	APP'D	Ku Chou	UNIT	mm	TOLERANCE		NIAN YEONG ENTERPRISE 年永實業有限公司	TITLE	M5*0.5 (F)板端			SHEET
CHK'D	Emily Suen			SCALE	1:1	.X ±0.20 .XX ±0.10 .XXX ±0.05 .XXXX ±0.03 ANGULA ±1°			PART NO.	SEE TABLE A	DWG NO.	QC4689	VERSION B