This document is the property of Nian-Yeong Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Nian-Yeong Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.

CUSTOMER DRAWING

REV.	DESCRIPTION	APPROVED BY	DATE	ECN NO.
A	RELEASE	Fido Weng	04/03/10'	
B				
C				

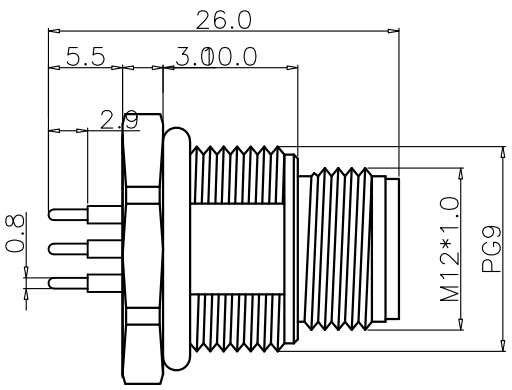

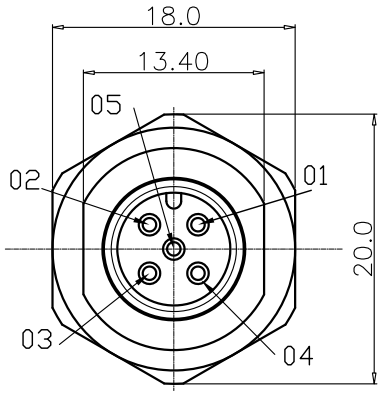



RECOMMENDPANEL CUT-OUT

TABLE A

 5PIN	 3PIN	 3PIN
WP-05M2-58 WP-05M3-22-11	WP-03M2-24 WP-03M2-68-11	WP-03M2-49-11 WP-03M2-69-11
 4PIN	 2PIN	 2PIN
WP-04M2-66 WP-04M3-16-11	WP-02M2-14 WP-02M3-11-11	WP-02M3-09-11 WP-02M3-10-11

PART NO	FINISH	PART NO	FINISH
WP-05M2-58	GOLD 10u"	WP-05M3-22-11	GOLD FLASH
WP-04M2-66	GOLD 10u"	WP-04M3-16-11	GOLD FLASH
WP-03M2-49-11	GOLD 10u"	WP-03M2-69-11	GOLD FLASH
WP-03M2-24	GOLD 10u"	WP-03M2-68-11	GOLD FLASH
WP-02M2-14	GOLD 10u"	WP-02M3-11-11	GOLD FLASH
WP-02M3-09-11	GOLD 10u"	WP-02M3-10-11	GOLD FLASH

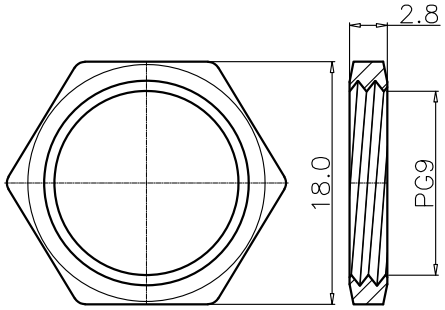

NUT

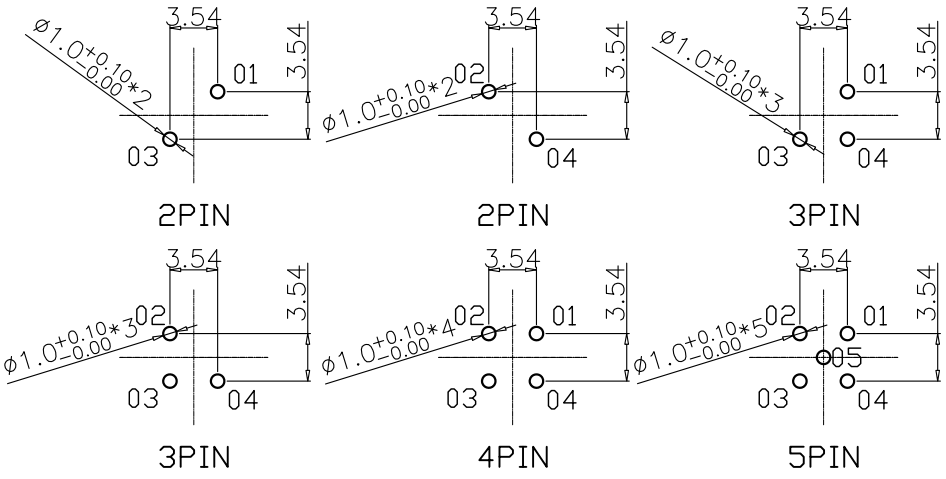

RECOMMEND P.C.B LAYOUT

1. MATERIAL :
   - 1-1. HOUSING : PBT UL94V-0 ; COLOR : BLACK
   - 1-2. CONTACT : BRASS
   - 1-3. NUT : BRASS
   - 1-4. SHELL : BRASS
   - 1-5. O-RING : EPDM ; COLOR : BLACK
2. FINISH :
   - 2-1. CONTACT : SEE TABLE A
   - 2-2. NUT : NICKEL PLATED
   - 2-3. SHELL : NICKEL PLATED
3. ELECTRICAL SPECIFICATION :
   - 3-1. Rated current : 4A
   - 3-2. Rated voltage : 2~4PIN 250V ; 5PIN 60V
   - 3-3. Water proof: IP67/IP68
4. Environmental :
   - 4-1. Operation Temperature : -40℃~85℃

DRAWN	Ku Chou	APPEND	Fido Weng	UNIT	mm	TOLERANCE .x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03 ANGULA ±1°	NIAN YEONG ENTERPRISE 年永實業有限公司	TITLE	防水頭 M12 A-Code (M) 前鎖 Pg9 插件式		SHEET 1/1
CHOKED	Emily Suen			SCALE	1/1			PART NO.	SEE TABLE A	DWG NO. QC5580	VERSION A