





CUSTOMER DRAWING

REV.	DESCRIPTION	APPROVED BY	DATE	ECN NO.
A	RELEASE	Fido Weng	19/05/23*	
B				
C				


Diagram of a 5-pin connector. The pins are numbered 1 to 5. Pin 1 is at the top right, pin 2 is at the top left, pin 3 is at the bottom left, pin 4 is at the bottom right, and pin 5 is in the center. The text "5PIN" is written below the diagram.

4PIN


WP-04M3-18-11

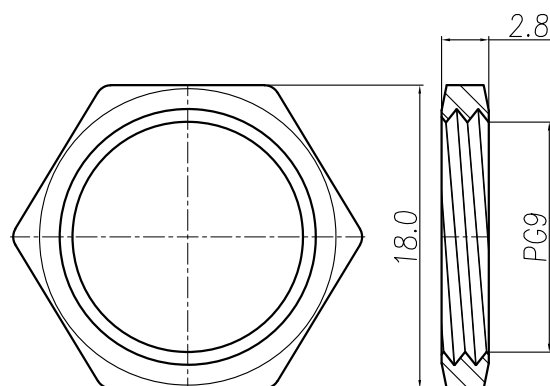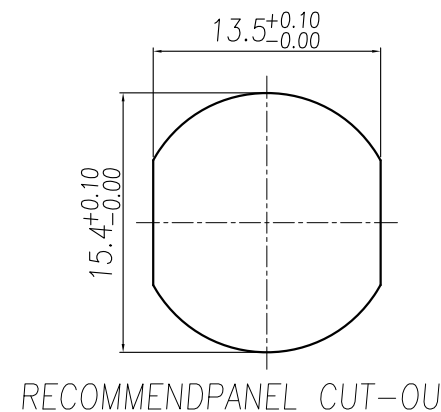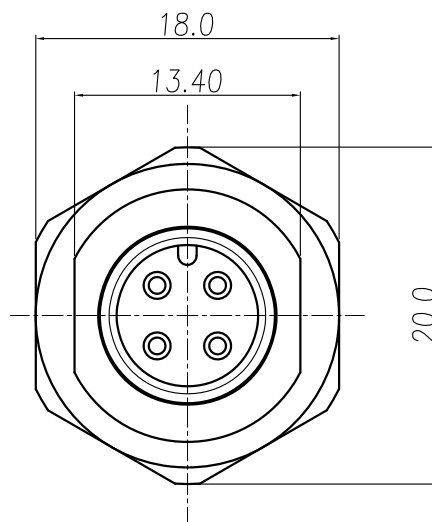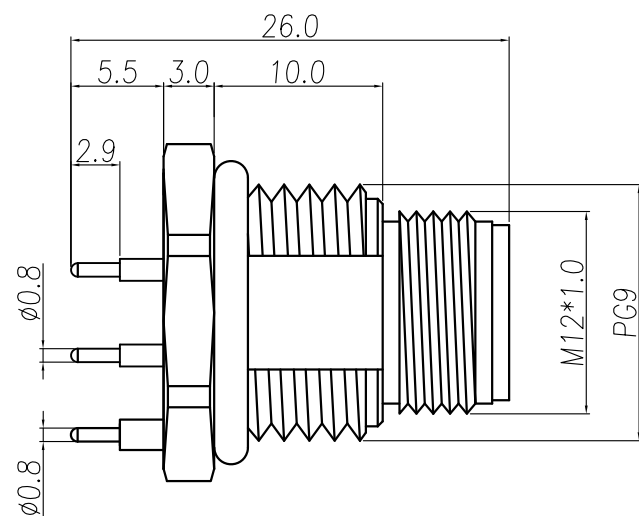

NUT

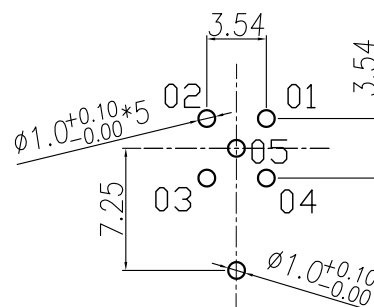

5 PIN

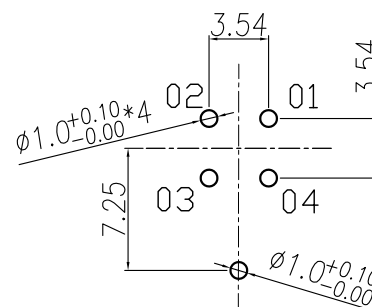

4 PIN

1. MATERIAL :
 - 1-1. HOUSING : PBT UL94V-0 ; COLOR : BLACK
 - 1-2. CONTACT : BRASS
 - 1-3. NUT : BRASS
 - 1-4. SHELL : BRASS
 - 1-5. O-RING : EPDM ; COLOR : BLACK
2. FINISH :
 - 2-1. CONTACT : 10u" GOLD PLATED
 - 2-2. NUT : NICKEL PLATED
 - 2-3. SHELL : NICKEL PLATED
3. ELECTRICAL SPECIFICATION :
 - 3-1. Rated current : 4A
 - 3-2. Rated voltage : 250V
 - 3-3. Water proof: IP67/IP68
4. Environmental :
 - 4-1. Operation Temperature : -40℃~85℃

DRAWN	Mark Kao	APPEND	Fido Weng	UNIT	MM	TOLERANCE .x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03 ANGULA ±1°			NIAN YEONG ENTERPRISE		TITLE	防水頭 M12 A-Code (M) 前鎖 PG9 插件式(帶接地)			SHEET
CHOKED	Emily Suen			SCALE	1:1	年永實業有限公司			PART NO.	SEE TABLE A	DWG NO.	QC10676	VERSION A		