This document is the property of Nian-Yeong Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Nian-Yeong Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.

CUSTOMER DRAWING

REV.	DESCRIPTION	APPROVED BY	DATE	ECN NO.
A	RELEASE	Fido Weng	18/03/19'	
B				
C				

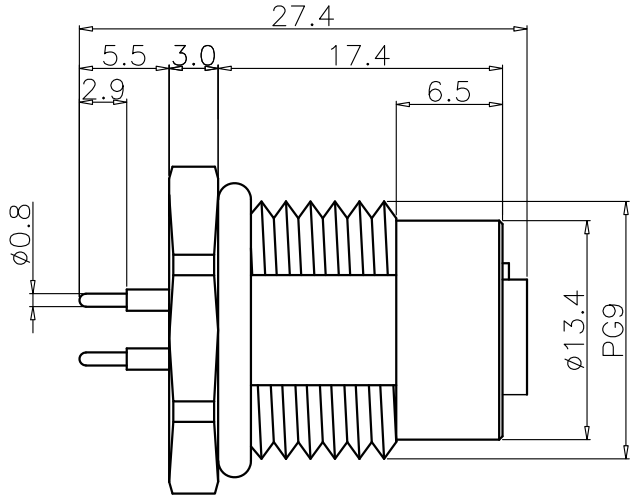

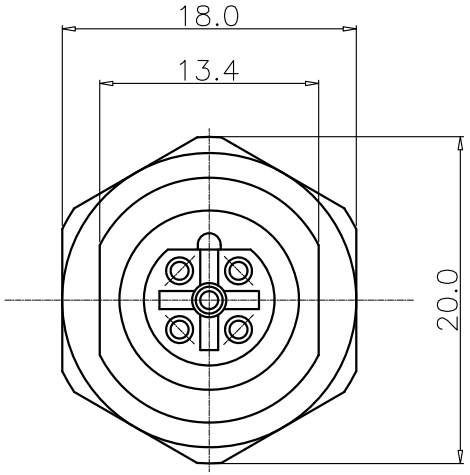

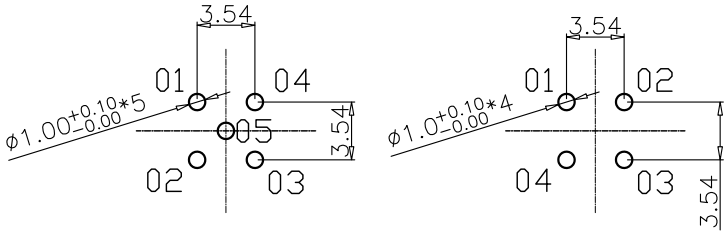

RECOMMEND P.C.B LAYOUT

TABLE A

5PIN	4PIN
WP-04F3-29-11	10u" GOLD PLATED/金10u"
WP-04F3-32-11	GOLD FLASH PLATED/表金
WP-05F2-169-11	GOLD FLASH PLATED/表金
PART No.	FINISH

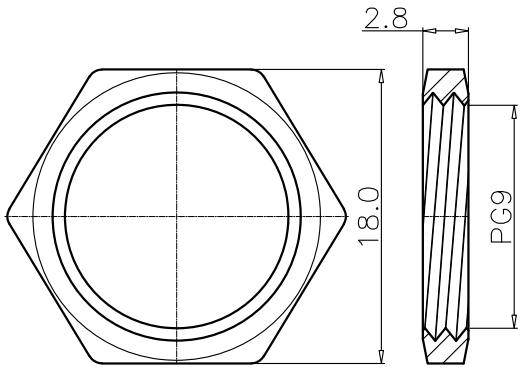

NUT

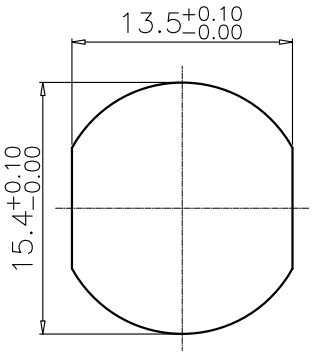

RECOMMENDPANEL CUT-OUT

1. MATERIAL :
   1-1. HOUSING : PBT UL94V-0 ; COLOR : BLACK
   1-2. CONTACT : BRASS
   1-3. NUT : BRASS
   1-4. SHELL : BRASS
   1-5. O-RING : EPDM ; COLOR : BLACK
2. FINISH :
   2-1. CONTACT : SEE TABLE A
   2-2. NUT : NICKEL PLATED
   2-3. SHELL : NICKEL PLATED
3. ELECTRICAL SPECIFICATION :
   3-1. Rated current : 4A
   3-2. Rated Voltage : 4PIN 250V ; 5PIN 60V
   3-3. Water proof: IP67
4. Environmental :
   4-1. Operation Temperature : -40℃~85℃

DRAWN	Ku Chou	APPEND	Fido Weng	UNIT	mm	TOLERANCE .x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03 ANGULA ±1°	NIAN YEONG ENTERPRISE 年永實業有限公司	TITLE	防水頭M12 B-code(F) 前鎖PG9插件式(無溝槽)		SHEET 1/1
CHOKED	Emily Suen			SCALE	1:1			PART NO.	SEE TABLE A	DWG NO. QC9007	VERSION A