


This document is the property of Nian-Yeong Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Nian-Yeong Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.


CUSTOMER DRAWING

REV.	DESCRIPTION	APPROVED BY	DATE	ECN NO.
A	RELEASE	LEO	22/09/26'	
B				
C				




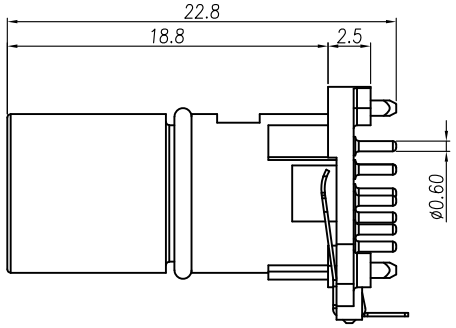







Pin Assignments
Front View

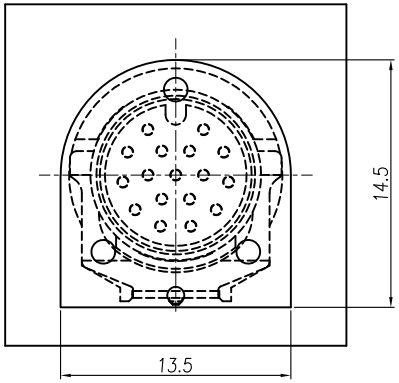

Component side (front view)
Recommended keepout area on the circuit board

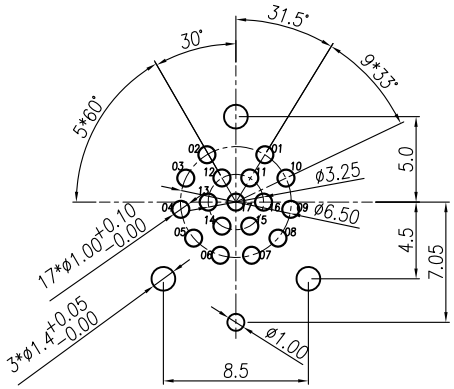

RECOMMEND P.C.B

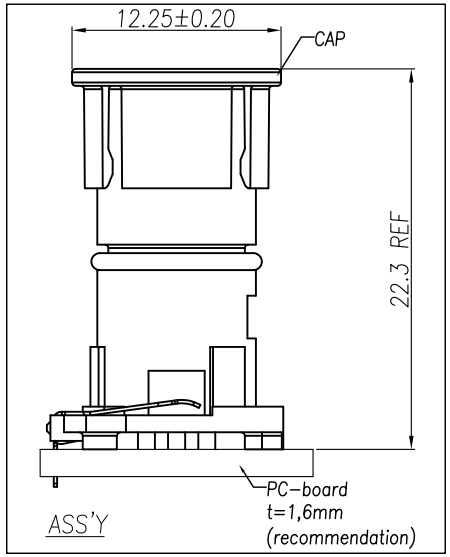

ASS'Y

1. MATERIAL :
   - 1-1. HOUSING : PA9T
   - 1-2. CONTACT : BRASS
   - 1-3. O-RING : VITON
   - 1-4. CAP : PA66
   - 1-5. GROUND : PHOSPHOR BRONZE
2. FINISH :
   - 2-1. CONTACT : GOLD FLASH PLATED.
   - 2-2. GROUND : NICKEL PLATED.
3. ELECTRICAL SPECIFICATION :
   - 3-1. Rated current : 1.5A
   - 3-2. Rated Voltage : 30V
   - 3-3. Water proof : IP67 (in mated condition)
4. Environmental :
   - 4-1. Operation Temperature : -25℃~85℃


DRAWN	LEO	APP'D	Ku Chou	UNIT	mm	TOLERANCE .x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03 ANGULAR ±1°	NIAN YEONG ENTERPRISE 年永實業有限公司	TITLE	M12 A-CODING 17P (M) Two-piece(Straight shielded THR)(螺孔鎖合)		SHEET 1/2
CHK'D	Ku Chou			SCALE	1/1			PART NO.	WP-17M4-01-11	DWG NO. QC11808	VERSION A


This document is the property of Nian-Yeong Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Nian-Yeong Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.

CUSTOMER DRAWING


REV.	DESCRIPTION	APPROVED BY	DATE	ECN NO.
A	RELEASE	LEO	22/09/26'	
B				
C				

步驟一：
1.將成品一一放入包裝盤內,依同一方向置入.
2.包裝方式,如圖所示.
3.一個包裝盤100pcs.(前後各留約十格)

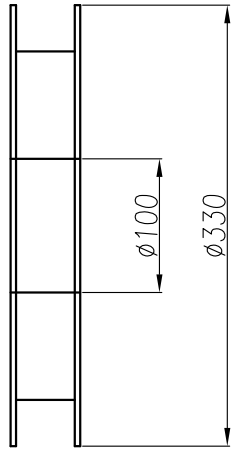


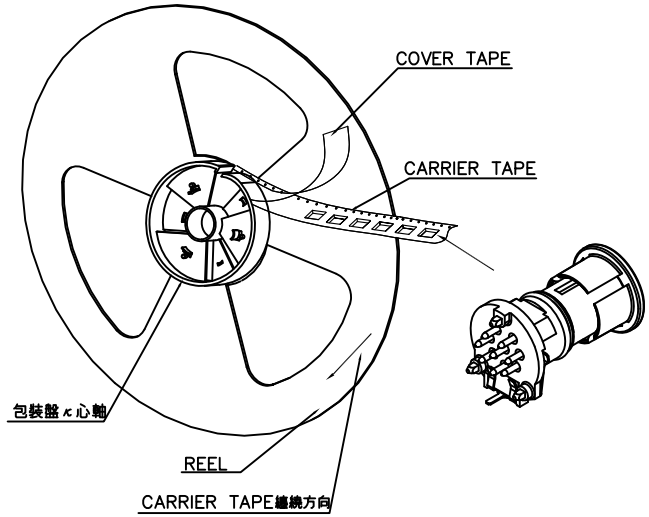

步驟二：
1.一個紙箱可以裝10個包裝盤.
2.每盤100pcs,每箱1000pcs.
3.將包裝盤放入防水袋中,包裝完後再封箱.

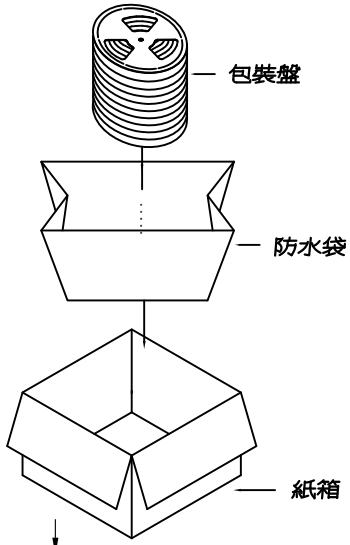

步驟三：
1.用膠帶將紙箱封實.

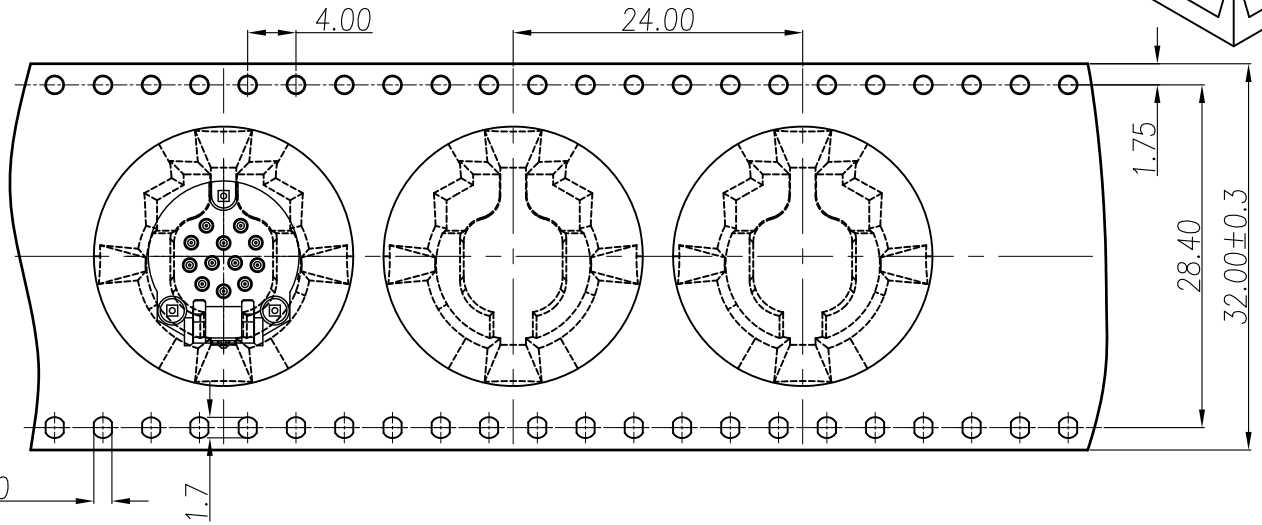

NOTE:
1.料帶尺寸符合(EIA－481－D)規範要求.
2.若有未裝滿之零數箱,必須以緩衝材塞滿.
3.在搬運過程中要輕拿輕放.
4.載運輸中不可堆放過多,不可有重壓現象.
5.上帶在貼下帶時必須平整.

DRAWN	LEO	APP'D	Ku Chou	UNIT	mm	TOLERANCE .x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03 ANGULA ±1°	NIAN YEONG ENTERPRISE 年永實業有限公司	TITLE	M12 A-CODING 17P (M) Two-piece(Straight shielded THR)(螺牙表金)		SHEET 2/2
CHK'D	Ku Chou			SCALE	1:1			PART NO.	WP-17M4-01-11	DWG NO. QC11808	VERSION A