



This document is the property of Nian-Yeong Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Nian-Yeong Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.


CUSTOMER DRAWING

REV.	DESCRIPTION	APPROVED BY	DATE	ECN NO.
A	RELEASE	Fido Weng	17/06/09*	
B	ADD P/N	KU CHOU	15/03/21*	
C				

TABLE A

 3PIN	 4PIN	 5PIN
WP-03F2-19 WP-03F2-164-11	WP-04F2-347-11 WP-04F2-275-11 WP-04F2-263-11 WP-04F2-44	WP-05F2-291-11 WP-05F2-207-11 WP-05F2-196-11 WP-05F2-44
 2PIN	 2PIN	 3PIN
WP-02F2-36-11 WP-02F2-95-11	WP-02F2-23-11 WP-02F2-96-11	WP-03F2-38-11 WP-03F2-152-11 WP-03F2-163-11


WP-05F2-291-11	GOLD FLASH PLATED	STAINLESS STEEL 316/PASSIVATION
WP-04F2-347-11	GOLD FLASH PLATED	STAINLESS STEEL 316/PASSIVATION
WP-05F2-207-11	10u" GOLD PLATED	STAINLESS STEEL 316/PASSIVATION
WP-04F2-275-11	10u" GOLD PLATED	STAINLESS STEEL 316/PASSIVATION
WP-03F2-164-11	10u" GOLD PLATED	STAINLESS STEEL 316/PASSIVATION
WP-03F2-163-11	10u" GOLD PLATED	STAINLESS STEEL 316/PASSIVATION
WP-02F2-96-11	10u" GOLD PLATED	STAINLESS STEEL 316/PASSIVATION
WP-02F2-95-11	10u" GOLD PLATED	STAINLESS STEEL 316/PASSIVATION
WP-05F2-196-11	GOLD FLASH PLATED	BRASS/NICKEL
WP-04F2-263-11	GOLD FLASH PLATED	BRASS/NICKEL
WP-03F2-152-11	GOLD FLASH PLATED	BRASS/NICKEL
WP-05F2-44	10u" GOLD PLATED	BRASS/NICKEL
WP-04F2-44	10u" GOLD PLATED	BRASS/NICKEL
WP-03F2-19	10u" GOLD PLATED	BRASS/NICKEL
WP-03F2-38-11	10u" GOLD PLATED	BRASS/NICKEL
WP-02F2-23-11	10u" GOLD PLATED	BRASS/NICKEL
WP-02F2-36-11	10u" GOLD PLATED	BRASS/NICKEL
PART No.	FINISH	NUT MATERIAL/FINISH

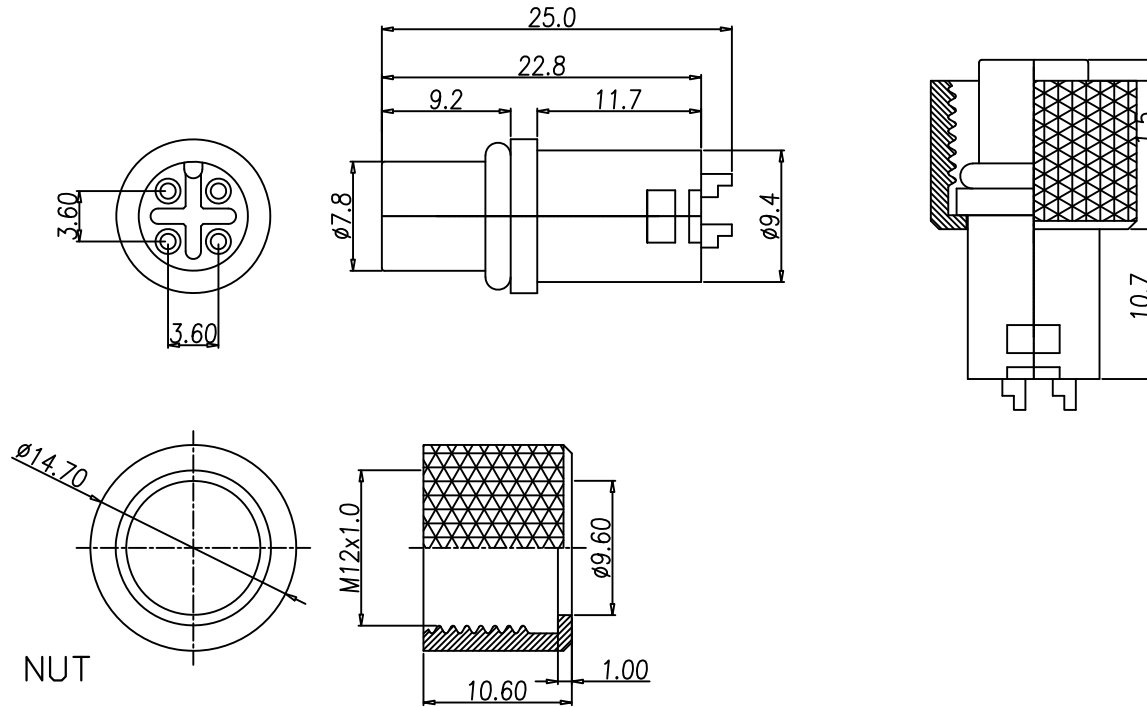

NUT

- MATERIAL :
 - HOUSING : PBT UL94V-0 ; COLOR : BLACK
 - CONTACT : BRASS
 - NUT : SEE TABLE A
 - O-RING : EPDM ; COLOR ; BLACK(7.5*1.5)
- FINISH :
 - CONTACT : SEE TABLE A ; UNDER PLATE : NICKEL
 - NUT : SEE TABLE A
- ELECTRICAL SPECIFICATION :
 - RATED CURRENT: 4A
 - RATED VOLTAGE : 2~4PIN 250V ; 5PIN 60V
 - WATER PROOF: IP67
- ENVIRONMENTAL :
 - OPERATION TEMPERATURE : -40℃~85℃

DRAWN	Emily Suen	APP'D	KU CHOU	UNIT	mm	TOLERANCE
CHK'D	KU CHOU			SCALE	1:1	.x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03 ANGULA ±1°



NIAN YEONG ENTERPRISE
年永實業有限公司

TITLE	防水頭 (F) 線端 (膠芯 L=22.8)			SHEET
PART NO.	SEE TABLE A	DWG NO.	QC4293	VERSION B