


This document is the property of Nian-Yeong Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Nian-Yeong Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.


CUSTOMER DRAWING

REV.	DESCRIPTION	APPVL. BY	DATE	ECN NO.
A	RELEASE	Fido	16/05/17	
B	尺寸變更	Fido	16/11/17	
C				

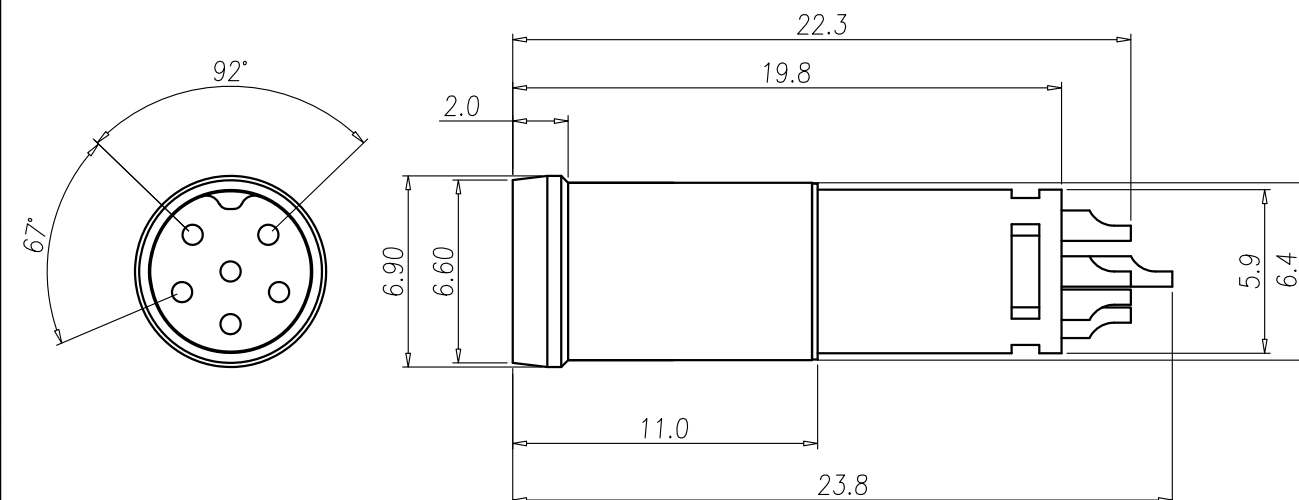

NOTE


- MATERIAL :
 - HOUSING : PA66 UL94V-0 ; COLOR : BLACK
 - CONTACT : BRASS.
 - NUT : SEE TABLE A
 - SHELL : SEE TABLE A
- FINISH :
 - CONTACT : SEE TABLE A
 - SHELL : SEE TABLE A
 - NUT : SEE TABLE A
- ELECTRICAL SPECIFICATION :
 - Rated current : 2A
 - Rated Voltage : 30V
 - Water proof : IP67
- Environmental :
 - Operation Temperature : -40℃~105℃

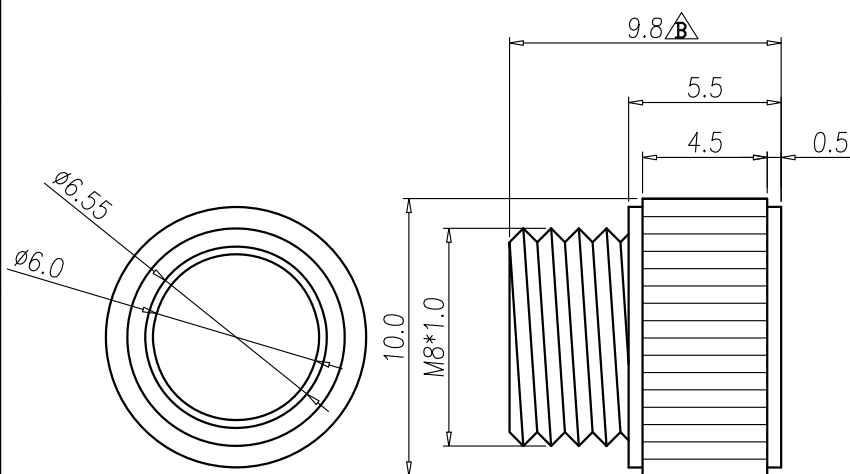

NUT

TABLE A

5PIN WP-05M2-166-11 WP-05M2-253-11	6PIN WP-06M2-51-11 WP-06M2-52-11 WP-06M2-53-11 WP-06M2-100-11
--	---

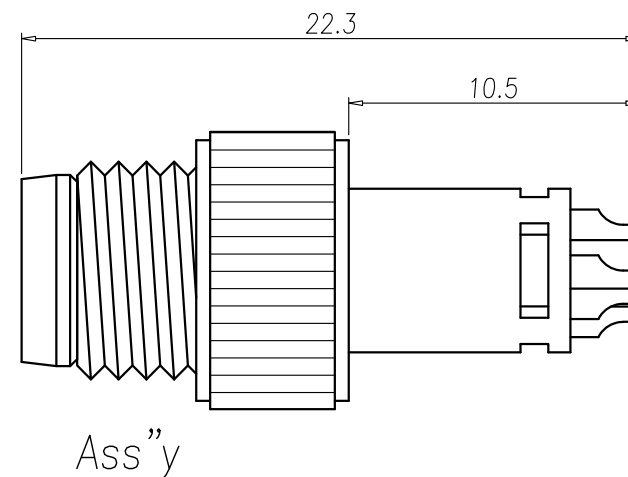

Ass'y

WP-05M2-253-11	BRASS	NICKEL PLATED	BRASS	NICKEL PLATED	GOLD FLASH PLATED
WP-06M2-100-11	BRASS	NICKEL PLATED	BRASS	NICKEL PLATED	GOLD FLASH PLATED
WP-05M2-166-11	BRASS	NICKEL PLATED	BRASS	NICKEL PLATED	10u" GOLD PLATED
WP-06M2-51-11	STAINLESS STEEL 316	PASSIVATION	STAINLESS STEEL 316	PASSIVATION	10u" GOLD PLATED
WP-06M2-52-11	BRASS	NICKEL PLATED	BRASS	NICKEL PLATED	10u" GOLD PLATED
WP-06M2-53-11	STAINLESS STEEL 316	PASSIVATION	BRASS	NICKEL PLATED	10u" GOLD PLATED
PART No.	MATERIAL(NUT)	FINISH(NUT)	MATERIAL(SHELL)	FINISH(SHELL)	FINISH(CONTACT)

DRAW	Ku Chou	APPVL	Emily Suen	UNIT	mm	TOLERANCE				NIAN YEONG ENTERPRISE 年永實業有限公司	TITLE	M8 (M) 線端焊線式(梅花型92°)			SHEET
CHECK	Emily Suen			SCALE	1:1	.x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03 ANGULA ±1°					PART NO.	SEE TABLE A	DWG NO.	QC7848	VERSION B