
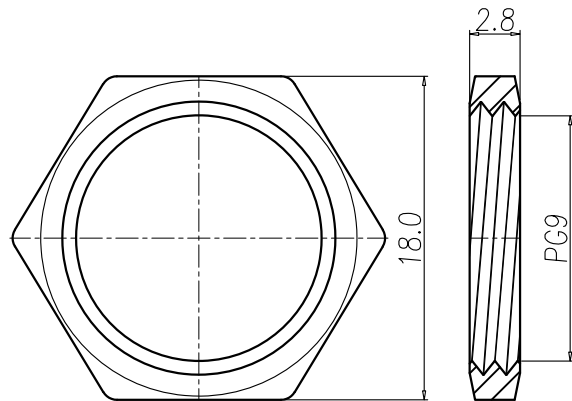
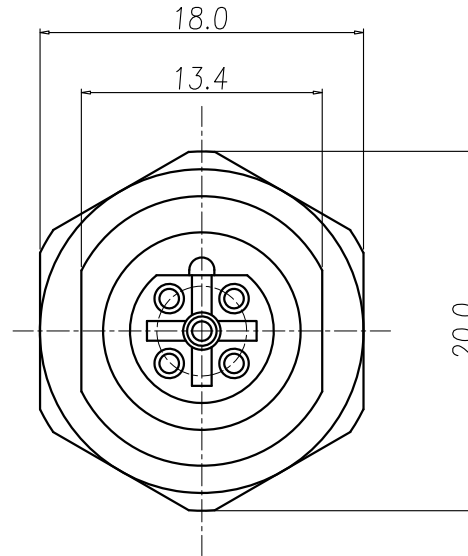



This document is the property of Nian-Yeong Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Nian-Yeong Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.

CUSTOMER DRAWING

REV.	DESCRIPTION	APPROVED BY	DATE	ECN NO.
A	RELEASE	KU CHOU	12/07/19*	
B				
C				

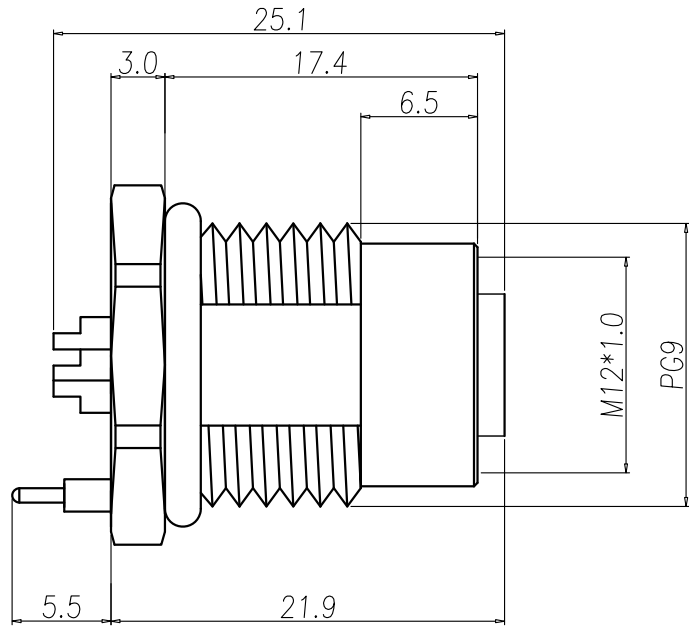

NUT

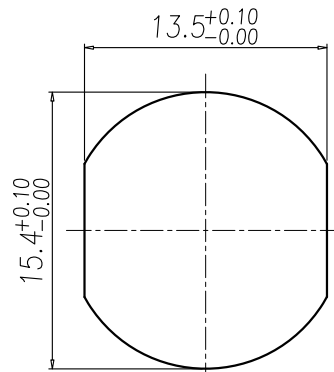

RECOMMEND PANEL CUT-OUT

- MATERIAL :
 - HOUSING : PBT UL94V-0 ; COLOR : BLACK
 - CONTACT : BRASS
 - NUT : BRASS
 - SHELL : BRASS
 - O-RING : EPDM ; COLOR : BLACK
- FINISH :
 - CONTACT : SEE TABLE A
UNDER PLATE : NICKEL
 - NUT : NICKEL PLATED
 - SHELL : NICKEL PLATED
- ELECTRICAL SPECIFICATION :
 - Rated current : 4A
 - Rated Voltage : 4PIN 250V ; 5PIN 60V
 - Water proof : IP67
- Environmental :
 - Operation Temperature : -40℃~85℃

TABLE A

5PIN	4PIN
WP-05F2-203-11 WP-05F2-295-11	WP-04F2-280-11 WP-04F2-349-11

WP-04F2-349-11	GOLD FLASH PLATED
WP-05F2-295-11	GOLD FLASH PLATED
WP-04F2-280-11	10u" GOLD PLATED
WP-05F2-203-11	10u" GOLD PLATED
PART No.	FINISH

DRAWN	EMILY SUEN	APP'D	KU CHOU	UNIT	mm	TOLERANCE			NIAN YEONG ENTERPRISE 年永實業有限公司	TITLE	防水環 M12 B-code (F) 插鎖Pg9屏蔽式(無漏槽+接地)			SHEET
CHK'D	KU CHOU			SCALE	1:1	.x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03 ANGULA ±1°				PART NO.	SEE TABLE A	DWG NO.	QC10089	VERSION A